




RC20



RC30



RC50

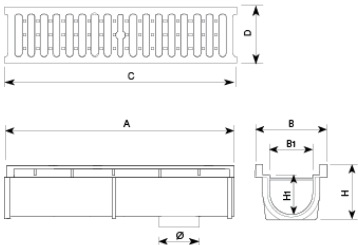

Designed to withstand medium traffic. Perfect for installation on roads with an ADT of 1,000-20,000, and in particular on road carriageways (including pedestrian streets), stabilised kerbstones and parking areas for all types of vehicles.

Complies with European standard EN-1433.
Metal non-slip surface.
Includes fixing system between the channel and the grate.
Coated with non-toxic, non-flammable and environmentally safe black paint.
IMPORTANT:
És imprescindible anivellar les canals llarg de la instal·lació i formigonar tant la base com les parets laterals, una instal·lació defectuosa anul·la tota garantia.

REF.		A	B	H1	C	D
RC15	D400	750	145	70	750	125
RC20	D400	750	230	120	750	195
RC30	D400	750	335	150	750	300

[Project sheet](#) | [CAD](#) | [HD image](#)

The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.