





Bollard made of red polyurethane with two reflecting bands. Absorbs any impact of vehicles and recovers verticality at 100%. Exceeds a flexion of 1500 cycles at 45° and 50 cycles at 90°, without damage.
Class "E" in terms of fire behaviour accoding to the UNE-EN 13501-1:2007+A1:2010 standard.
Resistant to -50° according to the UNE ISO 812 standard.



Ref.	Ø A	H	H1
H214ZR	100	1110	190
H214ZRM/1C	100	1110	190



Without maintenance.
Recommended anchoring: embedded.

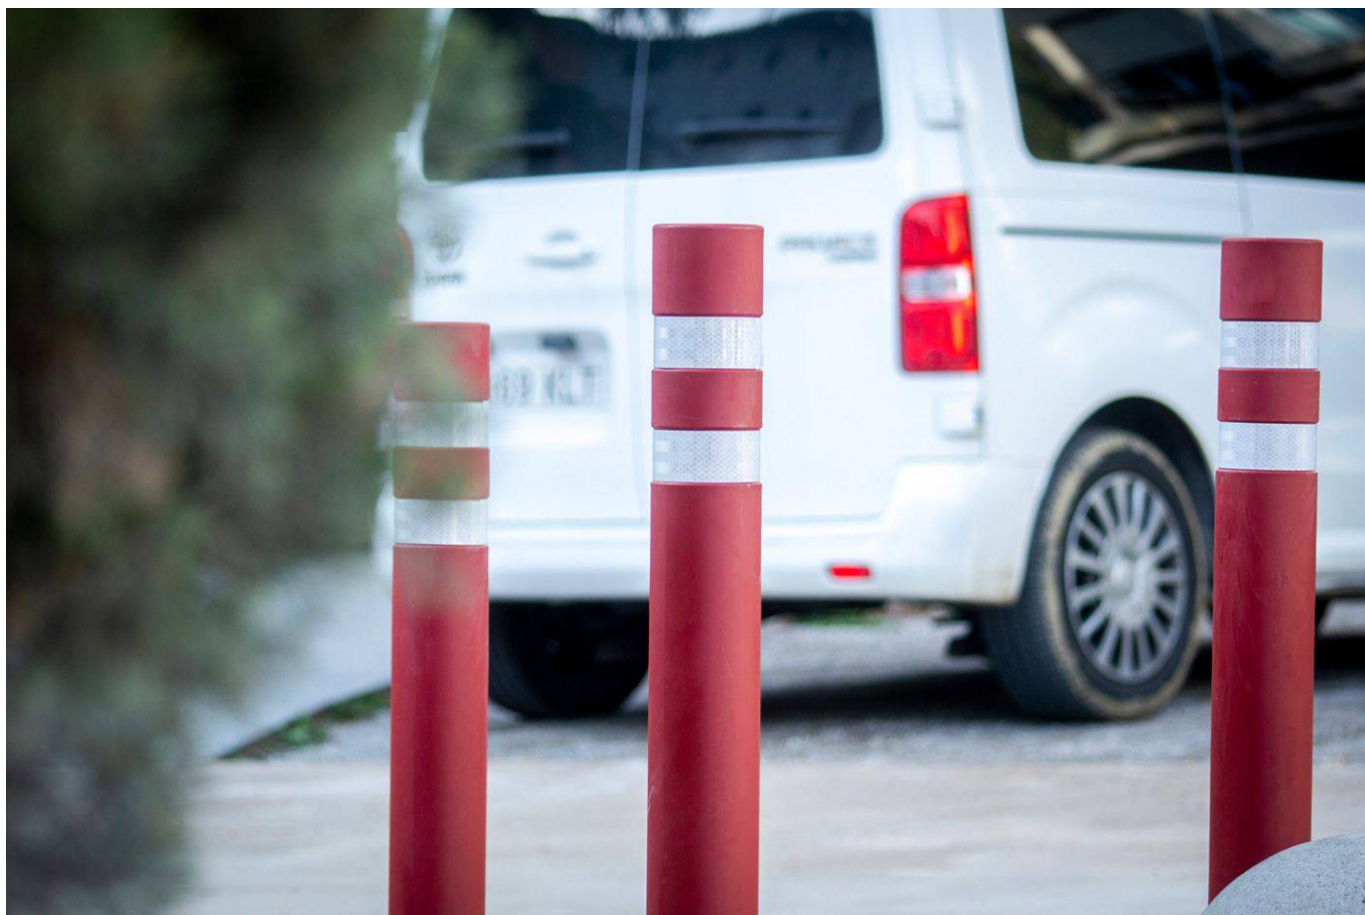

The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.