





Bench with ductile iron legs treated with Ferrus, a protective process that guarantees high resistance to corrosion. The Cantábrico Bench can be supplied in FSC wood

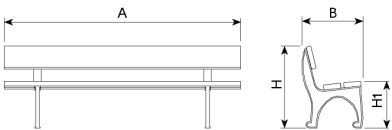

| Ref.  | A    | B   | H   | H1  |
|-------|------|-----|-----|-----|
| UM381 | 2000 | 505 | 700 | 400 |



[Maintenance guide](#) | [Project sheet](#) | [CAD](#) | [Catalogue](#) | [3D](#) | [Mounting instructions](#) | [HD image](#)

The Ferrus treatment consists of three layers applied after shot cleaning all impurities: an electrolytic bath, an epoxy coating and a forge black polyester paint coating.

Four 150 x 75 mm tropical wood boards treated with Lignus, a fungicide, insecticide and waterproof agent. Mahogany colour finish.

Stainless steel screws.

Recommended anchoring: M10 expansion bolts, depending on the surface and the project.



**BENITO**

info@benito.com  
tel. 93 852 1000