



Camprodón

AENOR EN40

Acero S-235-JR galvanizado con imprimación antioxidante y acabado negro microtexturado. Espesor (base, fuste): 3mm. Fijación especial 3 x M10 a 120°.

Acier S-235-JR galvanisé avec couche primaire antioxydation et revêtement en polyuréthane texturé forge. Epaisseur (embase, réhausse): 3mm. Fijaton spéciale avec 3 x M10 à 120°.

Steel S-235-JR galvanized with anti-rust primer and cast iron textured polyurethane coated. Thickness (base, shaft): 3mm. Special installation with 3 x M10 at 120°.




Otras luminarias / Autres luminaires
Other luminaires



CAMPRODÓN



VIALIA SUSPENDIDA

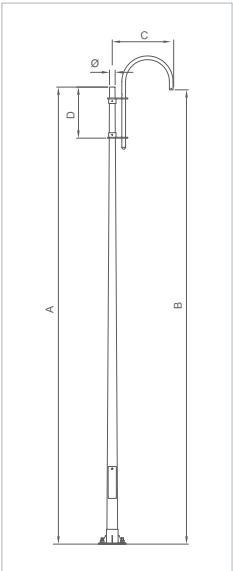

	A	B	C	D	Ø	G	H	Pernos / Tiges / Bolts	Ref		
CAMPRODÓN 50	5000	4970	645	560	60	300	200	M18X500	ICCP50N	x	x
CAMPRODÓN 60	6000	5970	645	560	60	400	300	M18X500	ICCP60N	x	x
CAMPRODÓN 70	7000	6970	645	560	60	400	300	M18X500	ICCP70N	x	x

