


[TH40D4](#)



[TH80D4](#)

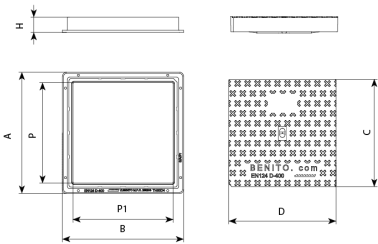

Hidráulica D4 is designed to support medium traffic. It is perfect for installing on roads with an ADT of 1.000-20.000, particularly road carriageways (including pedestrian streets), stabilised hard shoulders and parking areas for all manner of vehicles.

- Made from spheroidal graphite ductile cast iron, according to ISO 1083 (Type 500-7) and standard EN 1563.
- Compliant with the European standard UNE EN-124.
- One end is inserted to guarantee perfect placement.
- Groove to facilitate the opening process.
- Frame fitted with holes for fastening to the ground.
- Metal non-slip surface.
- Coated with non-toxic, non-flammable and non-polluting water-soluble black paint.
- Optional: security screw closure

[HD image](#)

V. 2024-03-13 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.

REF.	A	B	H	C	D	P	P1	UN.
TH100D4	995	995	80	895	895	870	870	