




APLR

Floodlight LINEO RGBW

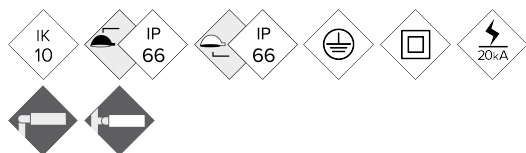

RGBW projector with a flat profile, with low wind resistance. Family with three different measurements and a wide range of powers, between 120W and 480W. It is available with multiple light distributions to suit each project. Its anchoring by means of a lyre allows orientations at any angle of inclination. Prepared for Regulation through DMX-512 protocol


MAIN FEATURES:

High efficiency. Up to 100 lm / W real.
3 different measures. From 20W to 60W.
Die-casting aluminium body
Independent regulation control for each color by means of DMX-512 protocol.
10mm Tempered glass with great robustness

APPLICATIONS:

Commercial and Tourist Streets
Architectural; Buildings and Monuments

DETAILS:

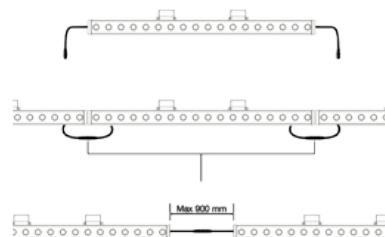

[Project sheet](#) | [CAD](#) | [HD image](#)


BENITO

info@benito.com
tel. 93 852 1000

SPECIFICATIONS :

| | |
|------------------------------------|---|
| Housing material: | High pressure die-cast aluminium EN AC-43000, EN AC-43100, EN AC-43400, EN AC-44100, EN AC-47100 according to the UNE EN 1706 standard |
| Diffuser (optic system enclosure): | Tempered 10 mm safety glass. UV filter |
| Fixing elements: | Stainless steel 18/8 - AISI 304 |
| Housing: | Driver / LED module |
| Sealing gaskets: | Silicone foam |
| IP rating (luminaire): | IP68 |
| IP rating (optic system): | IP68 |
| IK rating (impact resistance): | IK10 |
| LEDs thermal dissipation: | Thermal dissipation through finless luminaire body, without conductive fluids. Passive convection dissipation ensuring thermal contact with the LED modules through a high-conductivity thermal transfer material |
| Anti-condensation valve: | Pressure-balancing valve to ensure moisture release, avoid condensation and maintain the luminaire IP tightness |
| Paint and finishes: | Polyester powder paint coating, electrostatically sprayed and sublimated in the oven. Resistant to corrosion |
| Colour: | Cromed |
| Mounting: | Different options |
| Tilt range: | Yes |
| Maintenance: | Modular concept for easy component replacement: LEDs, drivers, SPD |
| Recommended mounting height: | Up to 8m |
| Driver: | Adjustable and programmable constant current driver. |
| Flow Reduction: | Dimmable Driver through DMX-512 protocol through a decoder. |
| Ready4IOT - Connectivity: | Dimming control compatible with any DMX-512 system. Optionally, a controller with internal memories of lighting scenes can be supplied. Includes programming software. |
| Surge protection device (SPD): | Type 2, 10kV and 20kA transient surge protector. Series connection with thermofuse disconnecter for a more effective protection at the end of its service life |

DRAWING:

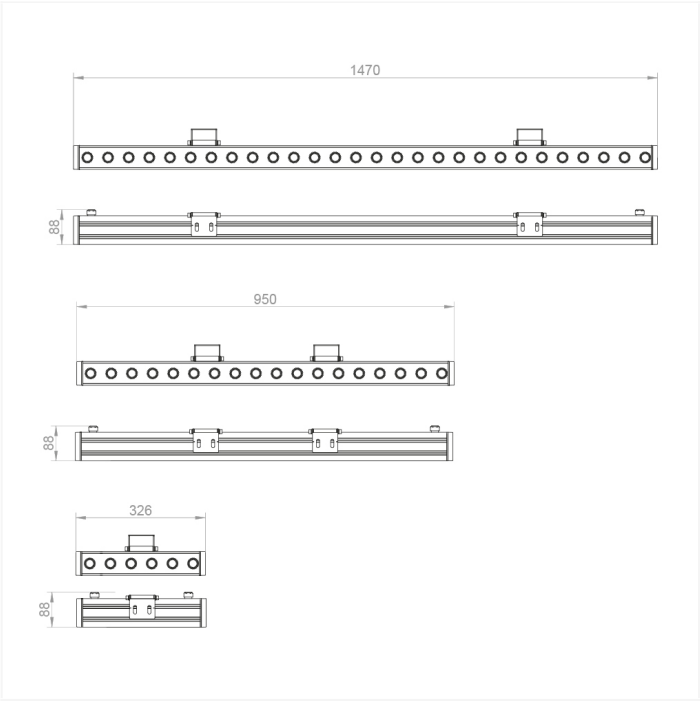


V. 2024-01-08 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.

TECHNICAL DATA:



| | REF. | Nº LEDs | Power W | I Driver mA | Real luminous flux (T) =85°C) | | Initial luminous flux (T) =25°C) | |
|--------------|-----------|---------|---------|-------------|-------------------------------|---------------|----------------------------------|---------------|
| | | | | | Flux lm | Efficacy lm/W | Flux lm | Efficacy lm/W |
| P LINEO RGBW | APLR1550 | 6 | 15 | 468 | 1500 | 100 | 1680 | 112 |
| | APLR40100 | 18 | 40 | 684 | 3760 | 96 | 4280 | 107 |
| | APLR60150 | 28 | 60 | 659 | 5520 | 92 | 6182 | 103 |

Luminous flux and efficiency at 4000°K and CRI>70.
Luminous flux tolerance < +/-3%.
Values may be subject to changes due to LED binning.

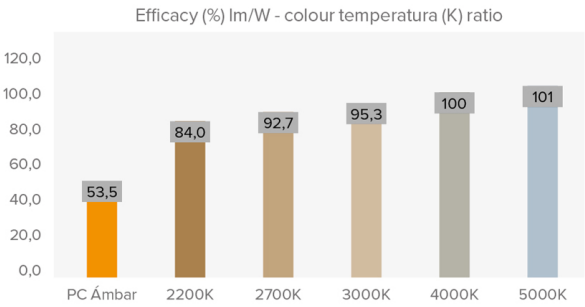

PHOTOMETRY:

V. 2024-01-08 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.

LEDs MODULE:

| | | | |
|---------------------------------|---|--|--|
| LEDs module: | BENITO-NOVATILU 6,18 and 28 LEDS. Check colour temperature, CRI and light distributions | | |
| Replaceable module: | Yes | | |
| LED: | LUXEON 3535 | | |
| Number of LEDs: | Depends | | |
| PCBs format: | Circulare | | |
| LED nominal efficacy: | 112 | | |
| Colour temperature: | R - G - B - W | | |
| Colour rendering index CRI: | Depends on the color | | |
| Average LED useful time L90B10: | L90B10 >100,000 hours | | |

OPTIC SPECIFICATIONS:

| | | | |
|---|---|-------|--|
| Optic system: | PMMA lenses 2x2 | | |
| Light distributions: | 18 light distribution curves | | |
| Upward light output ratio ULOR: | 0% | | |
| Downward light output ratio DLOR: | 100% | | |
| Glare index: | Between D5 and D6 (depending on the light distribution) | | |
| Luminous intensity category: | Between G*4 and G*6 (depending on the light distribution) | | |
| Luminous flux CIE n°3: | >95% | | |
| Photobiological safety: | RG0 (exempt of risk) | | |
| Initial luminous flux Tj=25°C (up to): | lm | 13954 | |
| Initial luminaire efficacy Tj=25°C (up to): | lm/W | 120 | |
| Real luminous flux Tj=85°C (UNE EN 13032-4) (up to): | lm | 12240 | |
| Real luminaire efficacy Tj=85°C (UNE EN 13032-4) (up to): | lm/W | 105 | |

ELECTRIC SPECIFICATIONS:

| | | |
|---|--|-------------------------------|
| Nominal maximum power (LEDs): | W | 108 |
| Maximum power consumed (luminaire): | W | 120 |
| Power range: | W | 0W - 120W |
| Maximum current of LED: | mA | <500 (<50% I _{max}) |
| Power supply protection classes IEC: | Class I and II | |
| Surge protection device (SPD): | Type 2, 10kV and 20kA transient surge protector. Series connection with thermofuse disconnecter for a more effective protection at the end of its service life | |
| Common and differential mode protection (SPD) U _{dc} : | kV | 10 and optional NTC |
| Max current (8/20) (SPD): | kA | 20 |
| Thermal phase disconnection (SPD): | Yes | |
| Input voltage: | V _{ac} | 220-240 |
| Input voltage (max rate): | V _{ac} | 198-264 |
| Input frequency: | Hz | 47-63 |
| Starting current: | A | <65 |
| Duration of the starting voltage peak: | ms | <0.3 |
| Driver efficacy: | >90% | |
| Power factor 100% consumption: | >0.98 | |
| Power factor 50% consumption: | >0.95 | |
| Total harmonic distortion (THD): | <10 | |
| Power consumption on standby mode: | W | <0.4 |
| Energy class: | A++ IPEA>1.15 | |

OPERATING CONDITIONS:

| | | |
|---|-------|-------------------------------------|
| Average LED useful time L90B10: | hours | >100,000 |
| Average driver useful life to Tp <70°C: | hours | 100,000 |
| Average luminaire useful life L90B10 (TM-21): | hours | 72,167 |
| Ambient temperature (Ta): | °C | From -35°C to +50°C |
| Aerodynamic resistance (CxS): | m2 | 0.039 |
| Vibration test (15Hz 3 axis): | | |
| Guarantee: | years | 5 years (extensible up to 10 years) |

PACKAGING DIMENSIONS:

| | | |
|------------------------------|----|-------------|
| Net weight | kg | 8.4 |
| Gross weight | kg | 9.4 |
| Luminaire dimensions (LxWxH) | mm | 490x390x81 |
| Packaging dimensions (LxWxH) | mm | 500x395x110 |
| Pieces per box | | 1 |
| Quantity per container 20ft | | 1344 |
| Quantity per container 40ft | | 2898 |

CERTIFICATES:

| | |
|------------------------|---|
| Security certificates: | EN 60598-1 / EN 60598-2-5 / EN 62493 / IEC 62471 |
| EMC certificates: | EN 55015 / EN 61547 / EN 61000-3-2 / EN 61000-3-3 / EN 61347-2-13 / EN 61347-1 / EN 62384 |
| Other certifications: | IEC 62262 / EN 13032-4 / EN 62717 / EN 6272-1 / EN 6272-2-1 / EN 61643-11 |

Company Certifications



BENITO

info@benito.com
tel. 93 852 1000