

**HFLEXLEDSOL** 



## Flexible luminous solar with LED

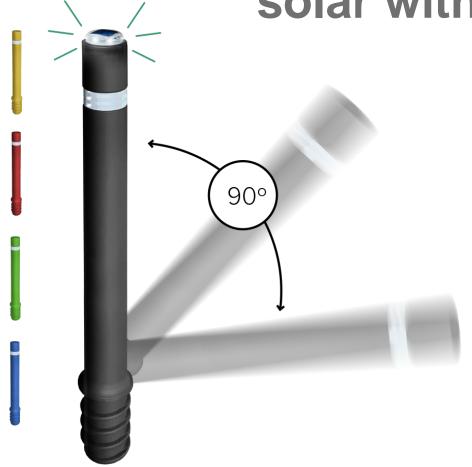


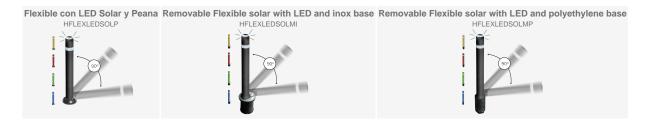

Luminous solar LED bollard made of flexible black polyurethane, resistant to UV rays, with reflective band.

Manufactured in fixed and removable version with polyurethane or stainless steel base. Available with a base plate for a bolt-on installation. Exceeds a flexion of 1500 cycles at 45° and 50 cycles at 90°, without damage.

Class "E" in terms of fire behaviour accoding to the UNE-EN 13501-1:2007+A1:2010 standard. Resistant to -50° according to the UNE ISO 812 standard.



Ref.	ØA	Н	H1
HflexLEDsol	100	1030	190



Project sheet | CAD | Catalogue | Mounting instructions | HD image



