
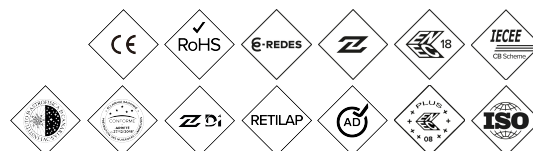


ALMXL

# Luminaire MILAN XL

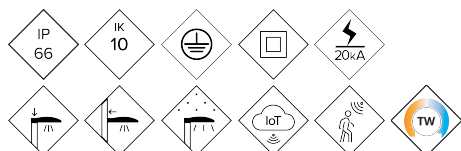

Aerodynamic and flat LED luminaire with low wind resistance. Comprehensive range available in five sizes with extensive optical and light distributions from 20W up to 300W to cover all road applications. High efficiency, reliability and quality, allowing quick return on investment. Ready for any intelligent lighting control solutions.


## MAIN FEATURES:

High efficiency. Up to 145 lm/W real  
5 different sizes. From 20W to 300W  
Double cavity, Driver and Optical Group  
Easy opening without tools  
18 different light distributions  
Zhaga Standard (Book 15)  
Ready 4IoT. Ready for connectivity


## APPLICATIONS:

Roads and Highways  
Roundabouts  
Urban Roads and Streets  
Parking


## DETAILS:

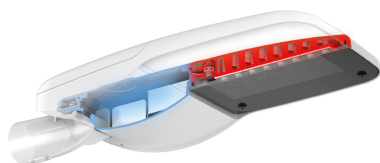

Double compartment.

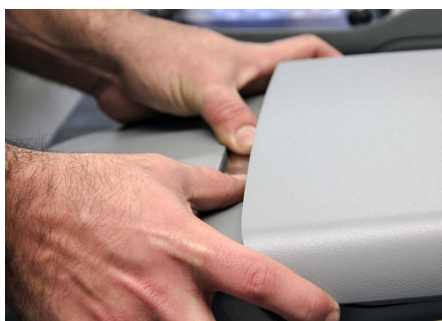

Tool-less top opening.

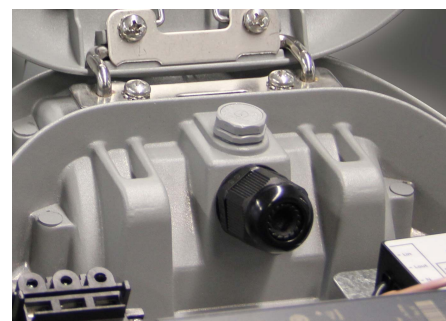

Anti-condensation valve .

[Project sheet](#) | [CAD](#) | [Mounting instructions](#) | [BIM](#) | [HD image](#)


# BENITO

info@benito.com  
tel. 93 852 1000

## SPECIFICATIONS :

Housing material:	Die-cast aluminium casting of type EN AC-43000, EN AC-43100, EN AC-43400, EN AC-44100, EN AC-47100 according to standard UNE EN 1706.
Diffuser (optic system enclosure):	5mm tempered glass, UV filtering. Polycarbonate available as an option.
Fixing elements:	18/8 Stainless Steel - AISI 304
Housing:	Double Cavity: Driver / LED Module
Sealing gaskets:	Silicone Foam
IP rating (luminaire):	IP66
IP rating (optic system):	IP66
IK rating (impact resistance):	IK09 - IK10
LEDs thermal dissipation:	Heat dissipation through the luminaire body, without external fins or conductive fluids. Passive heat dissipation by convection, ensuring thermal contact between the LED modules through highly conductive heat transfer material.
Anti-condensation valve:	Pressure compensation valve that ensures moisture evacuation, preventing condensation and maintaining the luminaire's IP rating.
Paint and finishes:	Polyester powder coating, electrostatically sprayed and oven-sublimated. Corrosion-resistant. (Marine-grade treatment available as an option).
Colour:	RAL 9022 color, and other colors on request
Mounting:	Post - Top Fixing Ø60mm (Ø76mm optional)
Tilt range:	Adjustable luminaire from -15° to 15° inclination
Maintenance:	Easy to open without any special tools. Replaceable modules: LEDs, drivers, SPDs.
Recommended mounting height:	9 - 12 m
Driver:	Constant current driver, dimmable and programmable at different levels (0-10V, 1-10V, DALI2, NFC). Built into the luminaire, pre-wired on a steel plate. .
Flow Reduction:	Double level with control line, different timed levels or virtual midnight, flow reduction at the head.
Ready4IOT - Connectivity:	Zhaga Base (Book 18) - D4i. (Optional). NEMA 5,7 Pins Base (Optional). Bottom side Presence Sensor on Zhaga Base (Book 18) - D4i. (Optional).
Surge protection device (SPD):	Type T2+T3, 10-20kV and 20kA transient surge protector. Series connection with thermofuse, disconnection for a more effective protection at the end of the SPD service life. (Optional SPD Full Permanent Surge Protector >264Vac to <170Vac).
DarkSky Approved	The mount is pre-installed at 90 deg post top orientation, or 0 deg lateral mount orientation and non-adjustable.

## DRAWING:

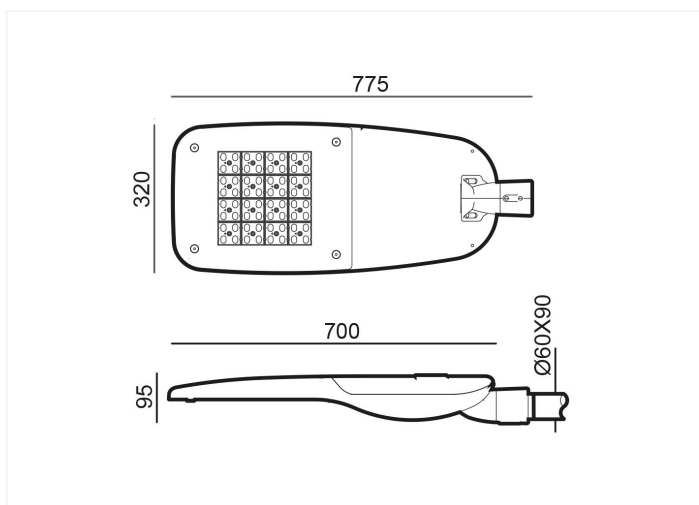


## INSTALLATION:




## TECHNICAL DATA:

	REF.	N° LEDs	Power W	I Driver mA	Real luminous flux (T) =85°C		Initial luminous flux (T) =25°C	
					Flux lm	Efficacy lm/W	Flux lm	Efficacy lm/W
Milan XL	ALMXL150	64	100	469	14200	142	16188	162
		64	120	563	17000	142	19380	162
		64	150	703	21000	140	23940	160

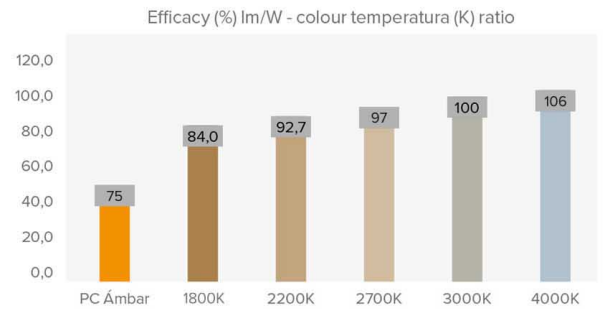

Luminous flux and efficiencies at 3000K and CRI>70 – Tolerance ± 3%  
 Approved by DarkSky with 3000K or lower

## PHOTOMETRY:

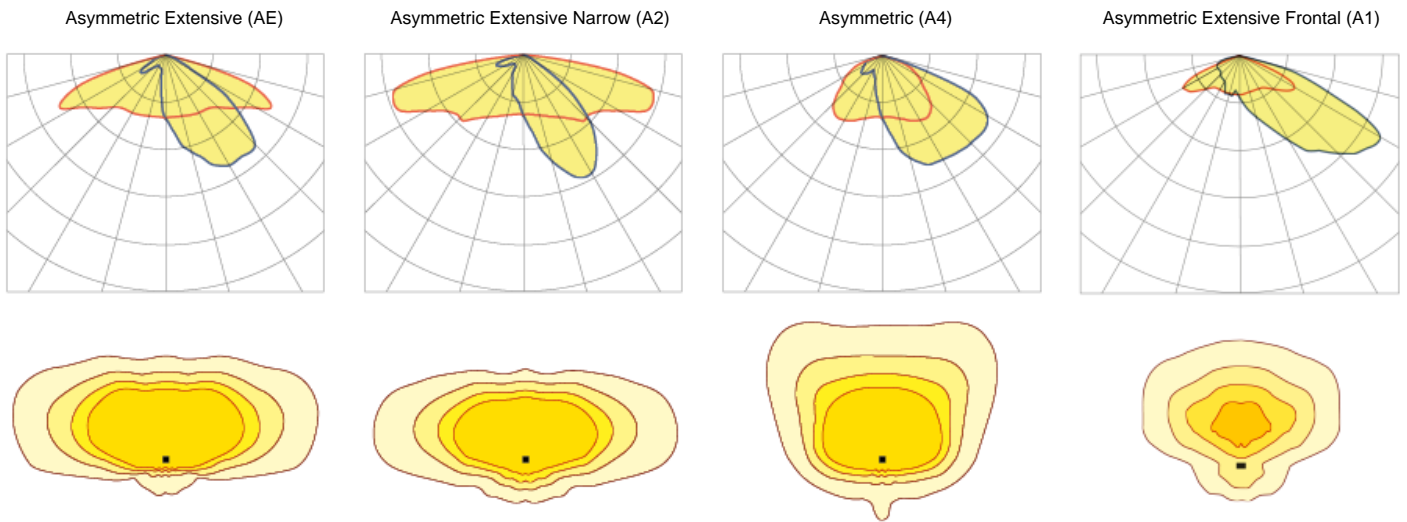

\*Show 4 recommended lighting distributions. Refer to the 18 typologies.

## LEDs MODULE:

LEDs module:	Benito Zhaga Format 8, 12, and 16 LEDs. Consult color temperatures, CRI, and light distributions. (NTC temperature probe optional).	
Replaceable module:	Yeah	
LED:	5050	
Number of LEDs:	64	
PCBs format:	4 Zhaga (Book 15) 2x8	
LED nominal efficacy:	172	
Colour temperature:	PC Amber - 1K8, 2K2, 2K7, 3K, 4K, 5K, TW - Tunable White	
Colour rendering index CRI:	>70 (optional >80)	
Average LED useful time L90B10:	L90B10 >100,000 hours	

## OPTIC SPECIFICATIONS:

Optic system:	PMMA 2x2 lenses	
Light distributions:	18 light distribution curves. A1,A2,A4 and AE distributions are DarkSky Approved.	
Upward light output ratio ULOR:	0%	
Downward light output ratio DLOR:	100%	
Glare index:	Between D5 and D6 (depending on the light distribution)	
Luminous intensity category:	Between G*4 and G*6 (depending on the light distribution)	
Luminous flux CIE n°3:	>95% (See 18 Light Distributions).	
Photobiological safety:	RG0 (risk-free)	
Initial luminous flux Tj=25°C (up to):	lm	23940
Initial luminaire efficacy Tj=25°C (up to):	lm/W	162
Real luminous flux Tj=85°C (UNE EN 13032-4) (up to):	lm	21000
Real luminaire efficacy Tj=85°C (UNE EN 13032-4) (up to):	lm/W	142

## ELECTRIC SPECIFICATIONS:

Nominal maximum power (LEDs):	W	135
Maximum power consumed (luminaire):	W	150
Power range:	W	100W - 150W
Maximum current of LED:	mA	<470 (LED Current = 50% Driver Current).
Power supply protection classes IEC:	Class I and II	
Surge protection device (SPD):	Type 2 and Type 3, 10-20kV and 20kA transient surge protector. Series connection with thermal fuse disconnecter for a more effective protection at the end of its service life.	
Common and differential mode protection (SPD) Udc:	kV	10
Max current (8/20) (SPD):	kA	20
Thermal phase disconnection (SPD):	Yes	
Input voltage:	Vac	220-240
Input voltage (max rate):	Vac	198-264
Input frequency:	Hz	47-63
Starting current:	A	<65
Duration of the starting voltage peak:	ms	<0.3
Driver efficacy:	>90%	
Power factor 100% consumption:	>0.98	
Power factor 50% consumption:	>0.95	
Total harmonic distortion (THD):	<10	
Power consumption on standby mode:	W	<0.4
Energy class:	C (According to EU Regulation 2019/2015 EPREL) - A++ IPEA>1.15	

## OPERATING CONDITIONS:

Average LED useful time L90B10:	hours	>100,000
Average driver useful life to Tp <70°C:	hours	100,000
Average luminaire useful life L90B10 (TM-21):	hours	>100,000
Ambient temperature (Ta):	°C	From -35°C to +50°C
Aerodynamic resistance (CxS):	m2	0.074
Vibration test (15Hz 3 axis):		
Guarantee:	years	5 (extensible up to 10 years)

## PACKAGING DIMENSIONS:

Net weight	kg	9.5
Gross weight	kg	10.5
Luminaire dimensions (LxWxH)	mm	775x320x95
Packaging dimensions (LxWxH)	mm	850x365x150
Pieces per box	1	
Quantity per container 20ft	560	
Quantity per container 40ft	1176	

## CERTIFICATES:

Security certificates:	EN 60598-1 / EN 60598-2-3 / EN 62493 / IEC 62471
EMC certificates:	EN 55015 / EN 61547 / EN 61000-3-2 / EN 61000-3-3 / EN 61347-2-13 / EN 61347-1 / EN 62384
Other certifications:	IEC 62262 / EN 13032-4 / EN 62717 / EN 6272-1 / EN 6272-2-1 / EN 61643-11

Company Certifications



# BENITO

info@benito.com  
tel. 93 852 1000