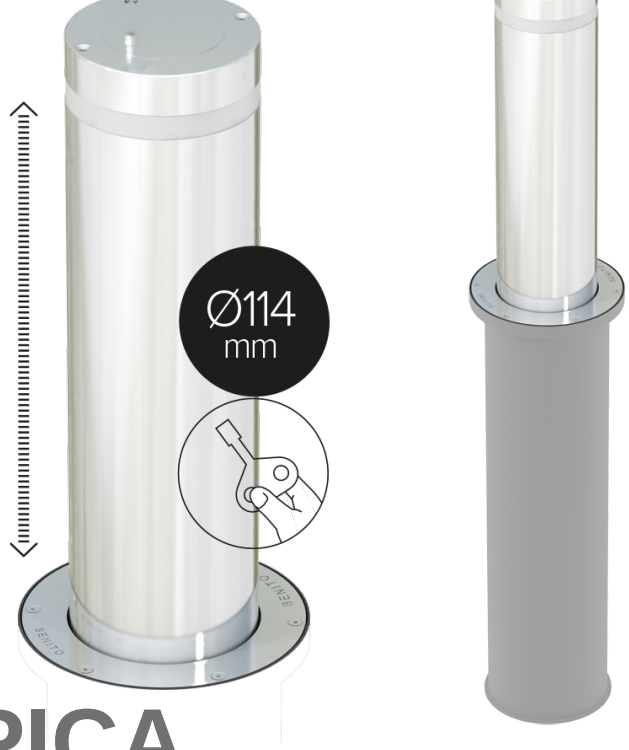


H1144

Bollard

TELESCÓPICA SEMIAUTOMÁTICA con llave Ø0.18"x19.69"

Metal
Key


Regulations and certifications:

ISO 9001 ISO 50001 ISO 14001 ISO 45001

Semi-automatic telescopic Bollard , Ø4.49" × 19.69", made of 0.16" thick satin-finished AISI 304 stainless steel. Designed for vehicle access control in public roads, residential communities, and businesses. Automatic raising via gas cylinder and manual lowering. When lowered, it sits flush with the ground, preventing tripping hazards. Automatic locking in both the raised and lowered positions, with release via a 0.39" DIN 3223 triangular key. Anti-theft system using rods.

		H114
DIMENSIONS AND MATERIALS	HEIGHT FROM GROUND LEVEL	**19.69"**
	BOLLARD DIAMETER	**Ø4.49"**
	BOX DIMENSIONS	**9.06x9.06x26.77"**
	BOLLARD MATERIAL	**Stainless steel**
		AISI 304 satin finish
FUNCTIONAL FEATURES	SYSTEM	
	WORKING FREQUENCY	**300Nw**
	ASCENT TIME	**Lifting mechanism with gas cylinder**
	LOWERING TIME	**Lowering mechanism - manual**
IMPACT RESISTANCE	**25,000 JOULES**	
	REFLECTIVE BAND	**Yeah**
	LIGHTED CROWN	**Optional**


V. 2026-09-22 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.



Ref.	ØA	B	C	ØE		Wt
H1144	4.49"	26.38"	19.69"	9.06"	0.16"	351 Lbs

Bollard available:

LED crown for better night visibility.
Reflective band that enhances safety.



Downloads: *Project sheet* | *CAD* | *Mounting instructions* | *BIM*



V. 2026-09-22 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.