


H2208H75R
Bollard

SEMI-AUTOMATIC TELESCOPIC with key Ø0.34"x29.53"



Regulations and certifications:

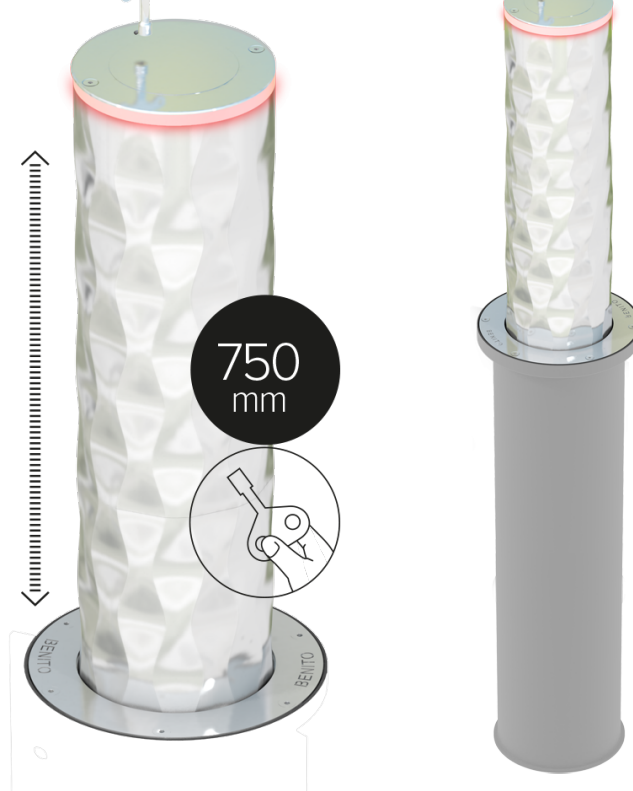


Bollard designed for access control on public roads, in communities, companies, etc. Automatic, easy and fast raising, manual lowering.
Automatic locking in both raised and lowered position, unlocking using a 0.39" DIN3223 triangular key.

		H2208H75R	H2208H75R_COPY_6279
DIMENSIONS AND MATERIALS	HEIGHT FROM GROUND LEVEL	29.53"	29.53"
	THICKNESS	0.31"	0.31"
	BOLLARD DIAMETER	Ø8.66"	Ø8.66"
	BOX DIMENSIONS	13.39x13.39x38.98"	13.39x13.39x38.98"
	BOLLARD MATERIAL	Stainless steel AISI 304 satin finish	Stainless steel AISI 304 satin finish
FUNCTIONAL FEATURES	SYSTEM	400Nw	400Nw
	WORKING FREQUENCY	Lifting mechanism with gas cylinder	Lifting mechanism with gas cylinder
	ASCENT TIME	Lowering mechanism - manual	Lowering mechanism - manual
IMPACT RESISTANCE	LOWERING TIME	80,000 JOULES	
	REFLECTIVE BAND	No	No
	LIGHTED CROWN	YES, RGB LED	YES, RGB LED


BENITO

info@benito.com
tel. 93 852 1000




Ref.	Ø A	B	C	D	E		Wt
H2208 H75R	Ø8.66"	0.04"	29.53"	10.79"	13.39"	0.31"	-
H2208 H75RL	Ø8.66"	0.04"	29.53"	10.79"	13.39"	0.31"	-

Semi-Automatic Telescopic with
key and LED Ø220 x 500
H2208L



SEMI-AUTOMATIC TELESCOPIC
with key Ø114 x 500 mm
H1144



Downloads: [Project sheet](#) | [CAD](#) |