




H2208L
Bollard

Semi-Automatic Telescopic with key and LED Ø8.66x19.69"

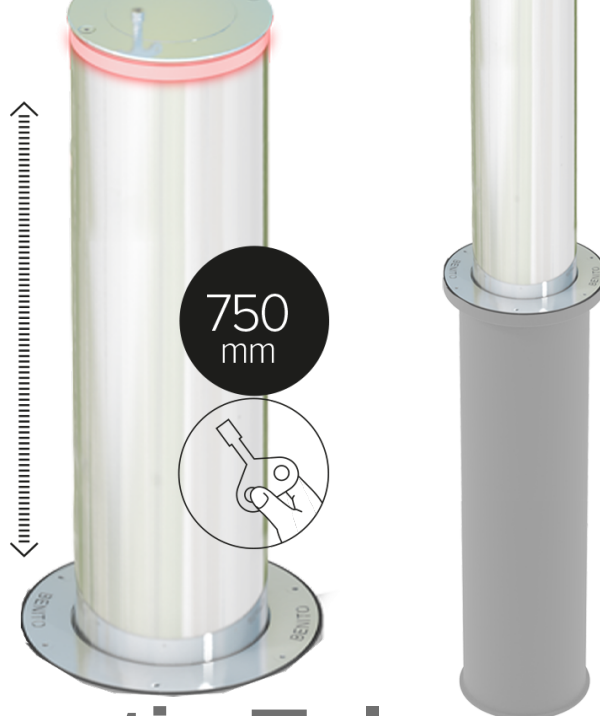


Regulations and certifications:



Bollard designed for controlling the access to the public road, communities of neighbours, companies, etc. AISI-304 satin stainless steel piston, Ø8.66x19.69" height. Top lid, chassis, fixing and screws made of stainless steel. Automatic rising and manual lowering. Automatic locking in both positions, unlocking by means of a DIN3223 triangular key.

		H2208L
DIMENSIONS AND MATERIALS	HEIGHT FROM GROUND LEVEL	19.69"
	THICKNESS	0.31"
	BOLLARD DIAMETER	Ø8.66"
	BOX DIMENSIONS	9.06x9.06x26.77"
	BOLLARD MATERIAL	Stainless steel AISI 304 satin finish
FUNCTIONAL FEATURES	SYSTEM	400Nw
	WORKING FREQUENCY	Lifting mechanism with gas cylinder
	ASCENT TIME	Lowering mechanism - manual
	LOWERING TIME	
IMPACT RESISTANCE	80,000 JOULES	
	REFLECTIVE BAND	OPTIONAL
	LIGHTED CROWN	YES, RGB LED



Ref.	Ø A	B	C	D	H	H	
H220 L8	8.66"	10.79'	13.39'	19.69'	46.06'	26.38'	0.31"
H220 L4	8.66"	10.79'	13.39'	19.69'	46.06'	26.38'	0.16"

SEMI-AUTOMATIC TELESCOPIC with key Ø220 x 750mm



Downloads: [Project sheet](#) | [CAD](#) | [BIM](#)



V. 2025-07-23 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.