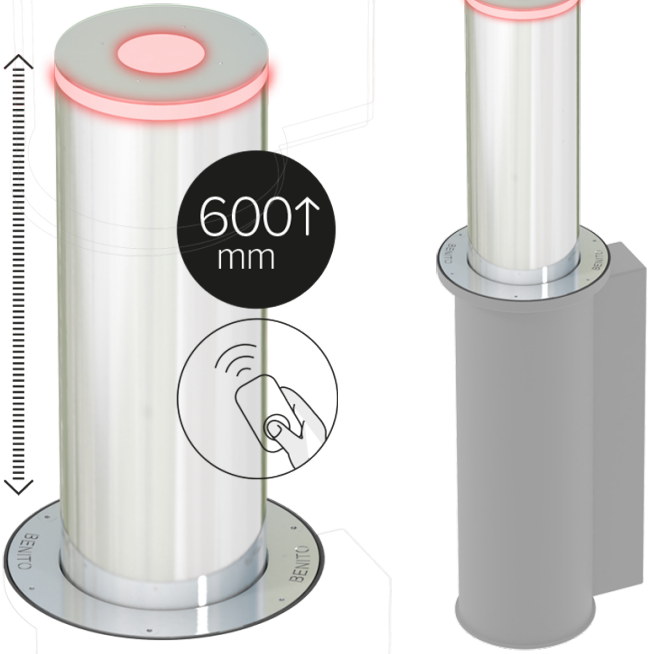


H6008

Bollard

TELESCÓPICA AUTOMÁTICA PLAZA Ø0.34"x23.62"

PAS 68

Certified according to PAS 68


Regulations and certifications:

ISO 9001 ISO 50001 ISO 14001 ISO 45001

Bollard designed for access control on public roads, in communities, businesses, etc. Manufactured with an AISI-304 stainless steel piston measuring Ø0.34"x23.62" in height. Surface cover, chassis, fasteners, and screws are all made of stainless steel. Signaling is provided by a red/green LED ring, functioning as a traffic light. Includes a metal detector for added safety. Operated by remote control or other devices. Maximum visibility thanks to its LED ring and traffic light function. Positive safety mechanism: when power is cut, the piston tends to lower. It prevents the bollard from rising even with a vehicle on top. Electronic limit switches are located at the top for greater reliability and never come into contact with water. It has a power consumption of 600W and a 300W motor (3000 rpm) with an IP67 protection rating. The raising/lowering time is 4 seconds.

		_COPY_2958
DIMENSIONS AND MATERIALS	HEIGHT FROM GROUND LEVEL	
FUNCTIONAL FEATURES	SYSTEM	
	REFLECTIVE BAND	


V. 2026-09-21 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.

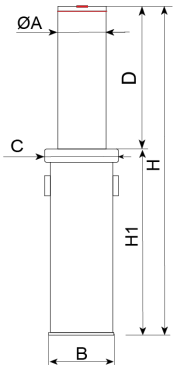

Ref.	ØA	B	C	D	H	H1		Wt
H6008	8.66"	10.79"	13.39"	23.62"	57.48"	34.25"	0.31"	-
H6013	8.66"	10.79"	13.39"	23.62"	65.35"	41.73"	0.51"	-

TELESCÓPICA AUTOMÁTICA PLAZA Ø220 x 750mm

H7508




Bollard reflective band



Bollard available:

LED crown for better night visibility.
Reflective band that enhances safety.



Downloads: *Project sheet* | *CAD* | *Mounting instructions* | *BIM*

V. 2026-09-21 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.