




H6008  
Bollard

# TELESCÓPICA AUTOMÁTICA

## Ø0.34"x23.62"

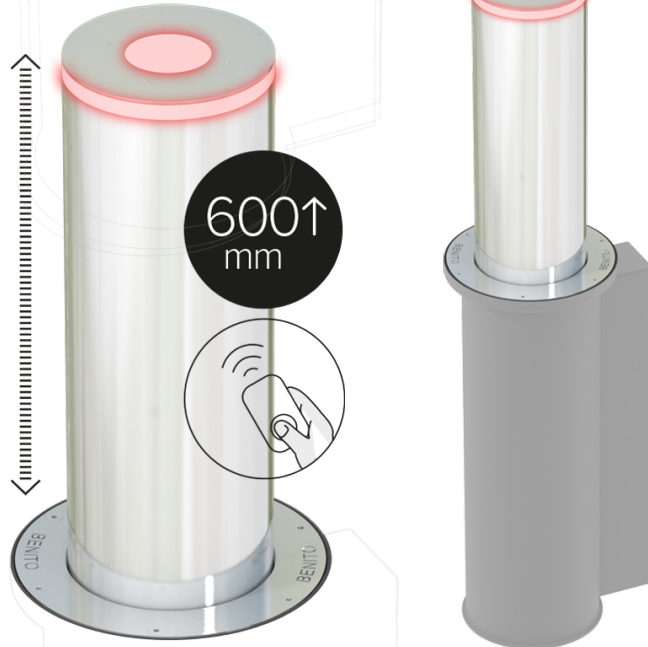

Certified  
according to  
PAS 68


Regulations and certifications:



Bollard designed for access control on public roads, in communities, businesses, etc. Manufactured with an AISI-304 stainless steel piston measuring Ø8.66x23.62" in height. Surface cover, chassis, fasteners, and screws are all made of stainless steel. Signaling is provided by a red/green LED ring, functioning as a traffic light. Includes a metal detector for added safety. Operated by remote control or other devices. Maximum visibility thanks to its LED ring and traffic light function. Positive safety mechanism: when power is cut, the piston tends to lower. It prevents the bollard from rising even with a vehicle on top. Electronic limit switches are located at the top for greater reliability and never come into contact with water. It has a power consumption of 600W and a 300W motor (3000 rpm) with an IP67 protection rating. The raising/lowering time is 4 seconds.


\_COPY\_2958

| DIMENSIONS AND MATERIALS | HEIGHT FROM GROUND LEVEL |        |                 |
|--------------------------|--------------------------|--------|-----------------|
|                          | FUNCTIONAL FEATURES      | SYSTEM | REFLECTIVE BAND |

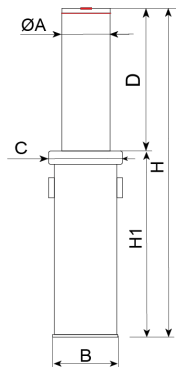

| Ref.      | ØA    | B          | C          | D          | H          | H1         |       | Wt |
|-----------|-------|------------|------------|------------|------------|------------|-------|----|
| H600<br>8 | 8.66" | 10.7<br>9" | 13.3<br>9" | 23.6<br>2" | 57.4<br>8" | 34.2<br>5" | 0.31" | -  |
| H601<br>3 | 8.66" | 10.7<br>9" | 13.3<br>9" | 23.6<br>2" | 65.3<br>5" | 41.7<br>3" | 0.51" | -  |

AUTOMATIC TELESCOPIC Ø220 x 750mm  
H7508



Bollard reflective band

**Bollard available:**

LED crown for better night visibility.  
Reflective band that enhances safety.



Downloads: [Project sheet](#) | [CAD](#) | [Mounting instructions](#) | [BIM](#)