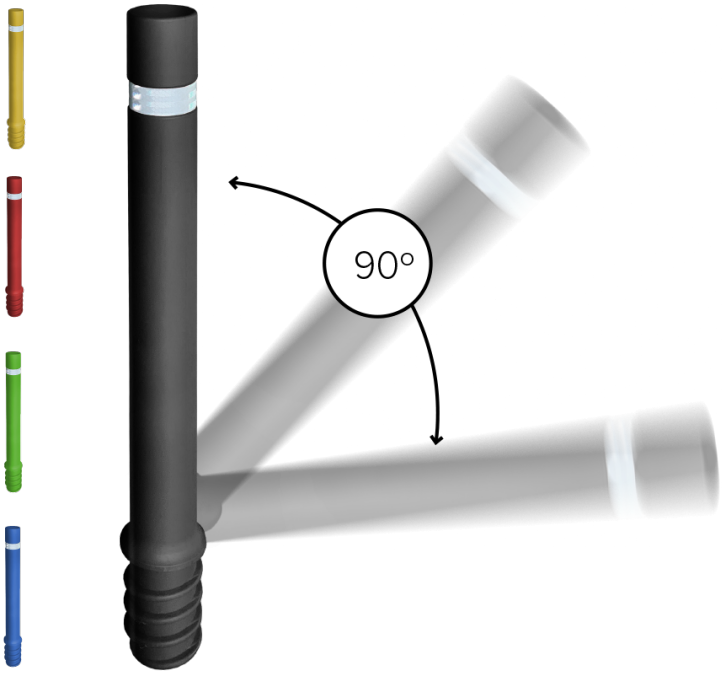



HFLEX

# Flex bollard

# - Flexible


Black
Color

Regulations and certifications:

ISO 9001 ISO 50001 ISO 14001 ISO 45001

**FLEX design mobile bollard, made of flexible polyurethane in black (optional in red, green, yellow or blue), UV resistant, with a reflective strip.**
**It is manufactured in fixed or mobile versions with polyurethane or stainless steel bases. It is also available with a pedestal for bolted installation. It can withstand 1,500 bending cycles at 45° and 50 cycles at 90° without damage. It has an "E" fire rating, according to UNE-EN 13501-1:2007+A1:2010.**
**Resistant to -50º according to UNE ISO 812 standard.**
**Recommended anchoring: By embedding.**

Materials & Finishes:





| Ref. | Ø A | H | H1 | Wt |
|---|---|---|---|---|
| Hflex | 3.94" | 39.37" | 7.48" | 8 Lbs |

V. 2025-09-29 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.


# Flex bollard - **Flexible**

HFLEX


**- Flexible con Peana**
HFLEXP




**- Flexible luminosa con LED solar**
HFLEXLEDSOL




**- Móvil Flexible base inox**
HFLEXMI




**- Móvil Flexible base poliuretano**
HFLEXMP




**Downloads:** *Project sheet* | *CAD* | *Mounting instructions* | *BIM*

V. 2025-09-29 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.