

HFLEX

Flex bollard

# - Flexible



Black  
Color

Regulations and certifications:



**FLEX design mobile bollard, made of flexible polyurethane in black (optional in red, green, yellow or blue), UV resistant, with a reflective strip.**

**It is manufactured in fixed or mobile versions with polyurethane or stainless steel bases. It is also available with a pedestal for bolted installation. It can withstand 1,500 bending cycles at 45° and 50 cycles at 90° without damage. It has an "E" fire rating, according to UNE-EN 13501-1:2007+A1:2010.**

**Resistant to -50° according to UNE ISO 812 standard.**

**Recommended anchoring: By embedding.**


Materials & Finishes:



Ref.	Ø A	H	H1	Wt
Hflex	3.94"	39.37"	7.48"	8 Lbs

# BENITO

info@benito.com  
tel. 93 852 1000

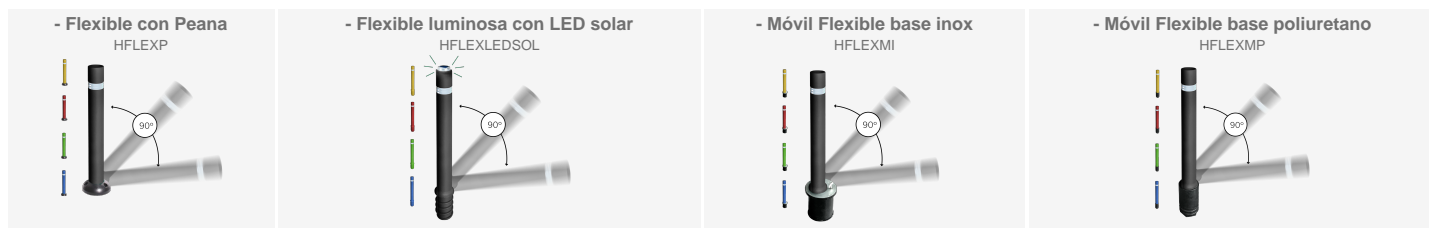

Downloads: [Project sheet](#) | [CAD](#) | [Mounting instructions](#) | [BIM](#)