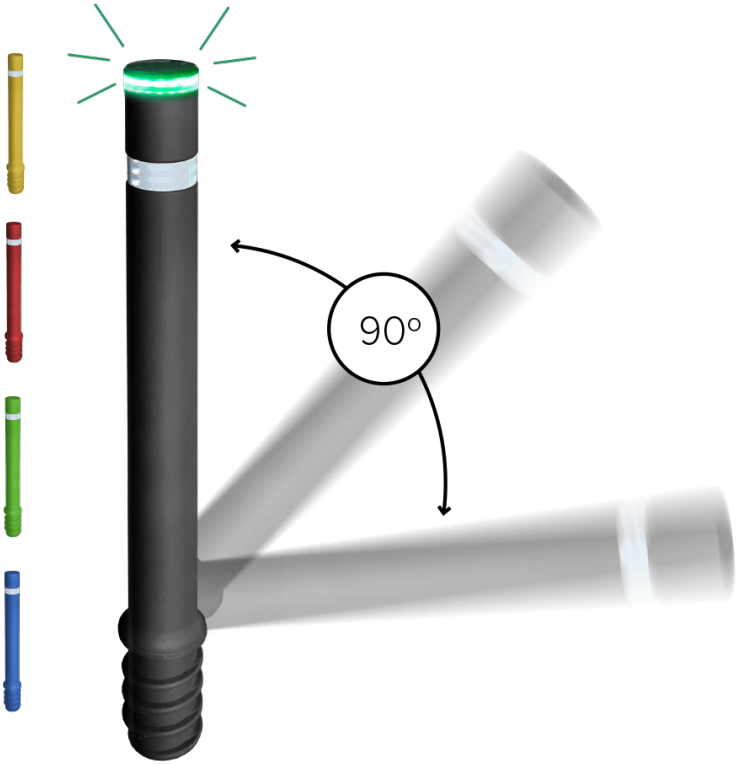


HFLEXLED

LEDFLEX bollard

- Flexible luminosa con LED


Black
Color

Regulations and certifications:

ISO 9001 ISO 50001 ISO 14001 ISO 45001


LEDFEX designer LED bollard light, made of flexible polyurethane in black (optional red, green, yellow or blue), UV resistant, with a reflective strip.
It is manufactured in fixed or mobile versions with polyurethane or stainless steel bases. It is also available with a pedestal for bolted installation. It can withstand 1,500 bending cycles at 45° and 50 cycles at 90° without damage. It has an "E" fire rating, according to UNE-EN 13501-1:2007+A1:2010.
Resistant to -50º according to UNE ISO 812 standard.
Recommended anchoring: By embedding.

Materials & Finishes:



Ref.	Ø A	H	H1	Wt
HflexLED	3.94"	40.94"	7.48"	-

Flexible con LED y Peana
HFLEXLEDP



Móvil Flexible con LED base polietileno
HFLEXLEDMP



V. 2026-08-17 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.

BENITO

info@benito.com
tel. 93 852 1000

LEDFLEX bollard - **Flexible luminosa con LED**

HFLEXLED

Downloads: *Project sheet* | *CAD* | *Mounting instructions* | *BIM*



V. 2026-08-17 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.