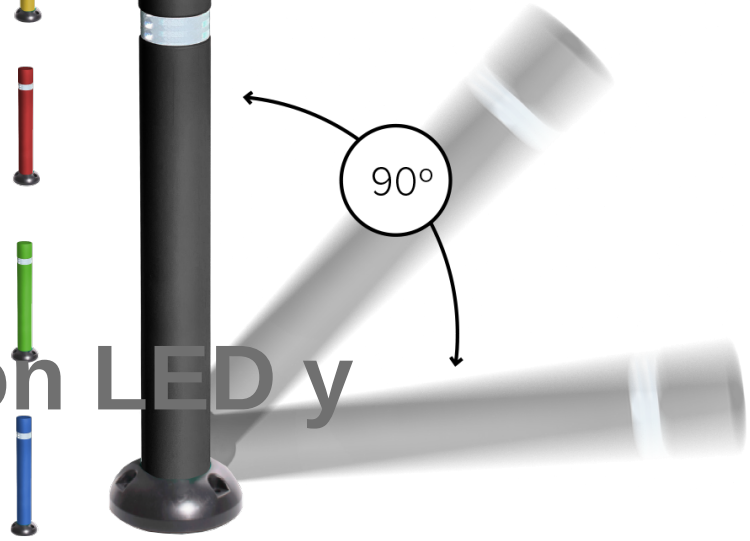

HFLEXLEDP

Pilon

Flexible con LED y Peana

Regulations and certifications:

ISO 9001 ISO 50001 ISO 14001 ISO 45001

LED bollard made of flexible polyurethane in black (optional in red, green, yellow or blue), UV resistant, with a reflective band. Designed with a base for screw mounting.
It is manufactured in fixed or mobile versions with polyurethane or stainless steel bases. A version with a pedestal for bolted installation is also available. It withstands 1500 bending cycles at 45° and 50 cycles at 90° without damage. It has a fire performance rating of "E" according to UNE-EN 13501-1:2007+A1:2010.
Resistant to -50º according to UNE ISO 812 standard.
Recommended anchoring: Three Ø0.02"x4.72" bolts depending on the paving

Materials & Finishes:



Ref.	Ø A	H	H1	Wt
HflexLEDP	3.94"	33.46"	Ø7.68"	-

V. 2026-04-07 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.

Pilon **Flexible con LED y Peana**

HFLEXLEDP

Downloads: *Project sheet* | *CAD* | *Mounting instructions* | *BIM*



V. 2026-04-07 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.