

HFLEXP

Flex bollard

- Flexible con Peana



Black
Color

Regulations and certifications:



FLEX design mobile bollard, made of flexible polyurethane in black (optional red, green, yellow, or blue), UV-resistant, and with a reflective strip. Designed with a base for bolt-on installation.

It is manufactured in fixed or mobile versions with polyurethane or stainless steel bases. It is also available with a pedestal for bolted installation. It can withstand 1,500 bending cycles at 45° and 50 cycles at 90° without damage. It has an "E" fire rating, according to UNE-EN 13501-1:2007+A1:2010.

Resistant to -50° according to UNE ISO 812 standard.

Recommended anchoring: Three bolts Ø0.39x4.72 in depending on the paving

Materials & Finishes:





Ref.	Ø A	H	H1	Wt
HflexP	3.94"	31.89"	Ø7.68 in	-

BENITO

info@benito.com
tel. 93 852 1000

Flex bollard - Flexible con Peana

HFLEXP

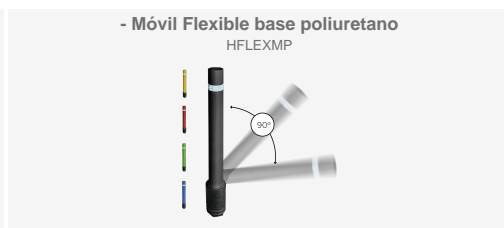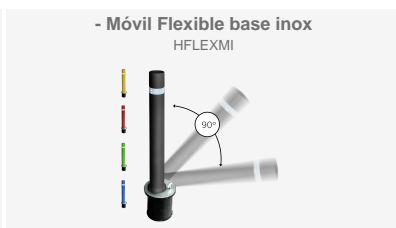

Downloads: [Project sheet](#) | [CAD](#) | [Mounting instructions](#) | [BIM](#)