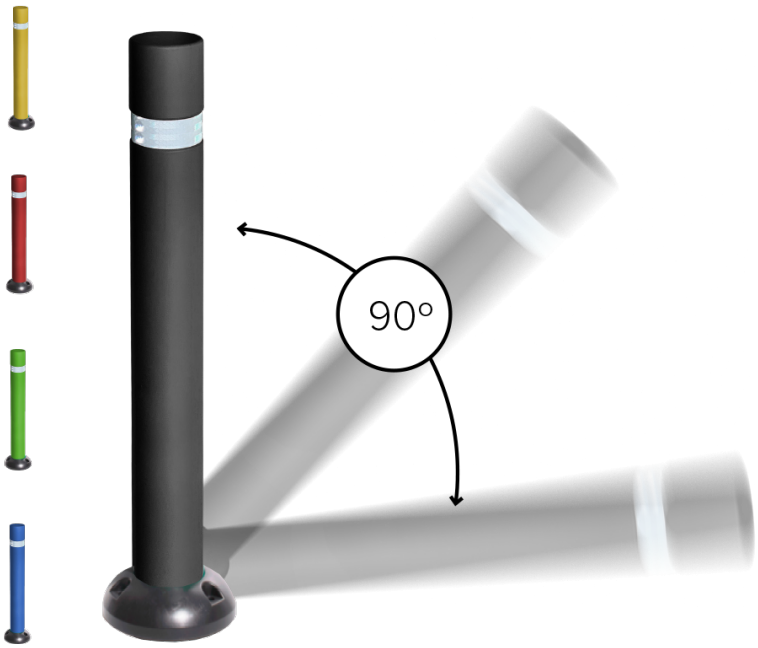


HFLEXP

Flex bollard

- Flexible con Peana


Black
Color

Regulations and certifications:

ISO 9001 ISO 50001 ISO 14001 ISO 45001

FLEX design mobile bollard, made of flexible polyurethane in black (optional red, green, yellow, or blue), UV-resistant, and with a reflective strip. Designed with a base for bolt-on installation.
It is manufactured in fixed or mobile versions with polyurethane or stainless steel bases. It is also available with a pedestal for bolted installation. It can withstand 1,500 bending cycles at 45° and 50 cycles at 90° without damage. It has an "E" fire rating, according to UNE-EN 13501-1:2007+A1:2010.
Resistant to -50º according to UNE ISO 812 standard.
Recommended anchoring: Three bolts Ø0.39x4.72" depending on the paving

Materials & Finishes:



Ref.	Ø A	H	H1	Wt
HflexP	3.94"	31.89"	Ø7.68"	-


V. 2026-06-10 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.

info@benito.com
tel. 93 852 1000


Flex bollard -
Flexible con Peana

HFLEXP

- Flexible luminosa con LED solar
HFLEXLEDSOL



- Móvil Flexible base inox
HFLEXMI



- Móvil Flexible base poliuretano
HFLEXMP



Downloads: *Project sheet* | *CAD* | *Mounting instructions* | *BIM*



V. 2026-06-10 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.