

UM311R

Bench

Gavarres

By Martí Franch © ® BENITO



Corten steel



Treated pine wood



M10 bolts fixing




Low maintenance

Regulations and certifications:

ISO 9001 ISO 50001 ISO 14001 ISO 45001

GAVARRES design Bench , total dimensions (length x height x depth) 72.83x31.89x22.64", made with Corten steel plate legs (maintenance-free) and pine wood planks (treated in a class 4 vacuum-pressure autoclave to prevent woodworm, termites, and insects). Stainless steel hardware. Prepared for anchoring with expansion bolts according to the surface and project. Optional not included: Customizable marking with 2.91x1.38" aluminum plate.

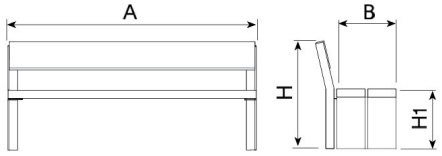

Ref.	A	B	H	H1	Wt
UM311R	72.83"	22.64"	31.89"	19.69"	185 Lbs
UM311S	18.11"	17.32"	19.69"	19.69"	69 Lbs
UM311	17.32"	19.69"	-	19.69"	111 Lbs
UM311RS	18.11"	22.64"	31.89"	19.69"	115 Lbs
UM311RD	144.88"	17.32"	31.89"	19.69"	154 Lbs
PA611	17.32"	18.11"	39.37"	112 Lbs	

BENITO

info@benito.com
tel. 93 852 1000

Bench **Gavarres** UM311R

Gavarres VM311	Gavarres UM311	Gavarres UM311RD	Gavarres PA611	Gavarres UM311RS	Taburete Sistema Modular Gavarres UM311S
					



Materials & Finishes:

Corten steel: The material itself creates its own protection through oxidation. The oxidation process goes through different stages of color until it reaches "stop," which is when it acquires its final color and stops losing rust and staining.
The oxidation process and its tone vary depending on the location where the product is installed and the sun/rain/wind cycles to which it is exposed.

Pressure-treated pine wood, risk factor IV, ensuring its durability outdoors for a minimum period of 10 years. Under weather conditions, treated wood develops a warm honey-brown color that eventually turns into a natural silver-gray. If exposed to variable weather conditions, this type of pine wood may develop some surface cracks that do not diminish its durability in any way. Regarding resin and knots, it's important to note that these are part of its natural appearance.

Downloads: *Project sheet* | *CAD* | *Mounting instructions* | *BIM*





info@benito.com
tel. 93 852 1000

Recommended anchoring: by means of M10 expansion bolts depending on the surface and the project.

Note:
Natural wood “breathes” i.e. it absorbs humidity and releases it in dry atmospheres. It is therefore normal for cracks to appear in wood. This has no effect whatsoever on its strength and durability.
The rust of Corten steel evolves over time. Therefore, this material will rust sooner or later depending on the humidity and temperature levels.

info@benito.com
tel. 93 852 1000