



UM314PR
Bench


Olea ReBnew



Corten
steel



Recycled
Product



ReBnew
material



20 years
warranty



Low
maintenance

Regulations and certifications:



OLEA ReBnew design Bench, total dimensions (length x height x depth) 70.87x27.95x19.69", made with 1.97x3.94" corten steel tubular legs. ReBnew profiles (BENITO's recycled polymer that is produced entirely from yellow container packaging and does not require any maintenance) with a section of 4.33x1.57x70.87". Ecological, it comes from recycled products and is 100% recyclable. Stainless steel screws. Recommended anchoring: M10 floor fixing screws depending on the surface and project. Optional item not included: Bench with epoxy primer finish and marson polyester powder paint.

Materials & Finishes:


ReBnew: 100% recycled polymer, sturdy and durable, derived from urban, industrial, and domestic waste... It is weather-resistant, resistant to oils, acids, and seawater. It does not splinter or crack, nor does it rot or dry out.

Irregular surface finish makes the board extremely durable as it effectively hides scratches caused by vandalism. Nevertheless, surface scratches can be repaired to restore it to a like-new condition.

Scratch Repair on ReBnew

AWARDED WITH "DER BLAUE ENGEL": Product with low environmental impact throughout its lifecycle. It is awarded to products that meet criteria for reducing environmental impact in manufacturing, recycling, packaging, use, emissions, collection, and disposal. In addition to environmental criteria, it includes quality, safety, energy consumption, and other considerations. It is one of the most prestigious labels globally.

Corten steel: The material itself creates its own protection through oxidation. The oxidation process goes through different stages of color until it reaches "stop," which is when it acquires its final color and stops losing rust and staining. The oxidation process and its tone vary depending on the location where the product is installed and the sun/rain/wind cycles to which it is exposed.

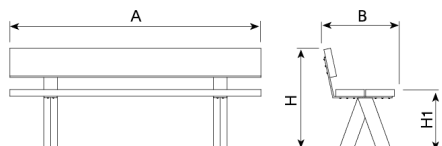

Ref.	A	B	H	H1	Wt
UM314PR	70.87"	19.69"	27.95"	17.32"	2 Lbs
UM314BPR	70.87"	15.35"	-	17.32"	2 Lbs
UM314GPR	70.87"	24.02"	28.74"	17.72"	2 Lbs

Olea
UM314



BENITO

info@benito.com
tel. 93 852 1000

Downloads: [Project sheet](#) | [CAD](#) | [Mounting instructions](#) |



V. 2026-07-27 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.