




UM397BE
Bench

Leman

By Compagnies Desrues © ® BENITO

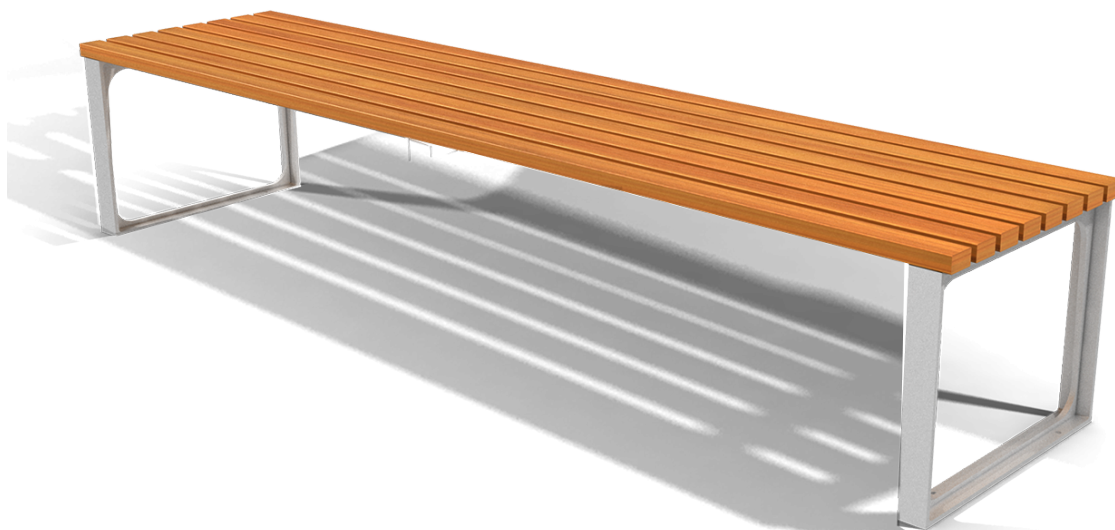

Regulations and certifications:





Stool made with ductile iron legs, with Ferrus treatment, an iron protection process that guarantees optimal corrosion resistance.

Materials & Finishes:

Ductile Iron treated with FERRUS: iron protection process that ensures optimal corrosion resistance. The Ferrus treatment consists of three layers applied after cleaning all dirt and impurities using shot blasting, involving an electrolytic bath followed by an epoxy primer and a final coating of polyester powder paint. Forged black colour

Hardwood treated with LIGNUS: Wood from responsible forestry. Density greater than 930kg/m³, at 12% humidity, treated with a triple-layer LIGNUS coating, fungicide, insecticide, and water-repellent that provides protection against moisture penetration. Final finish with a layer of natural pigment in a satin finish, which provides additional protection against UV rays, the main cause of deterioration in this type of material.



Ref.	A	B	H	H1	Wt
UM397E	77.36"	23.62"	32.68"	16.93"	176 Lbs
UM397BE	77.36"	21.46"	18.11"	-	2 Lbs
UM397SE	22.24"	23.62"	32.68"	16.93"	88 Lbs

Leman
UM397SE



Leman
UM397E



BENITO

info@benito.com
tel. 93 852 1000

Downloads: [Maintenance guide](#) | [Project sheet](#) | [CAD](#) | [3D](#) | [Mounting instructions](#)