


Solar LED



Columna fabricada en acero S-235 JR, galvanizada y acabada en color gris RAL 7040. Dos baterías de gel y un regulador de carga ubicados dentro de la base para facilitar tareas de mantenimiento y programación sin necesidad de maquinaria elevadora. Módulo fotovoltaico de 250 Wp. El sistema funciona a una tensión de 24 V DC y únicamente se pueden instalar luminarias de LED con alimentación de entrada 24V DC.

Mât fabriquée en acier S-235 JR galvanisé et finition en gris RAL. Deux batteries au gel et un régulateur de charge situés dans l'embase pour faciliter les tâches d'entretien et de programmation sans avoir à utiliser d'engin de levage. Module photovoltaïque de 250 Wp. Le dispositif fonctionne avec une tension de 24 V DC et on peut uniquement installer des luminaires LED avec une source de 24V DC.

Pole manufactured in S-235 JR galvanized steel, with RAL 7040 grey finish. Two gel batteries and a charge controller, located inside the base for easier maintenance and programming without the need for lifting equipment. 250Wp photovoltaic module. The system works at 24 V DC tension and can be installed only LED luminaires with 24V DC power supply.

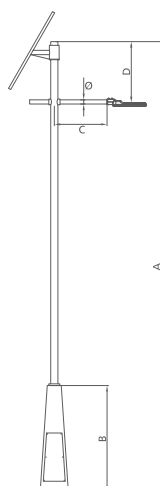

REF.	H	☐
ICSOL60R7040V3	6,35m	X

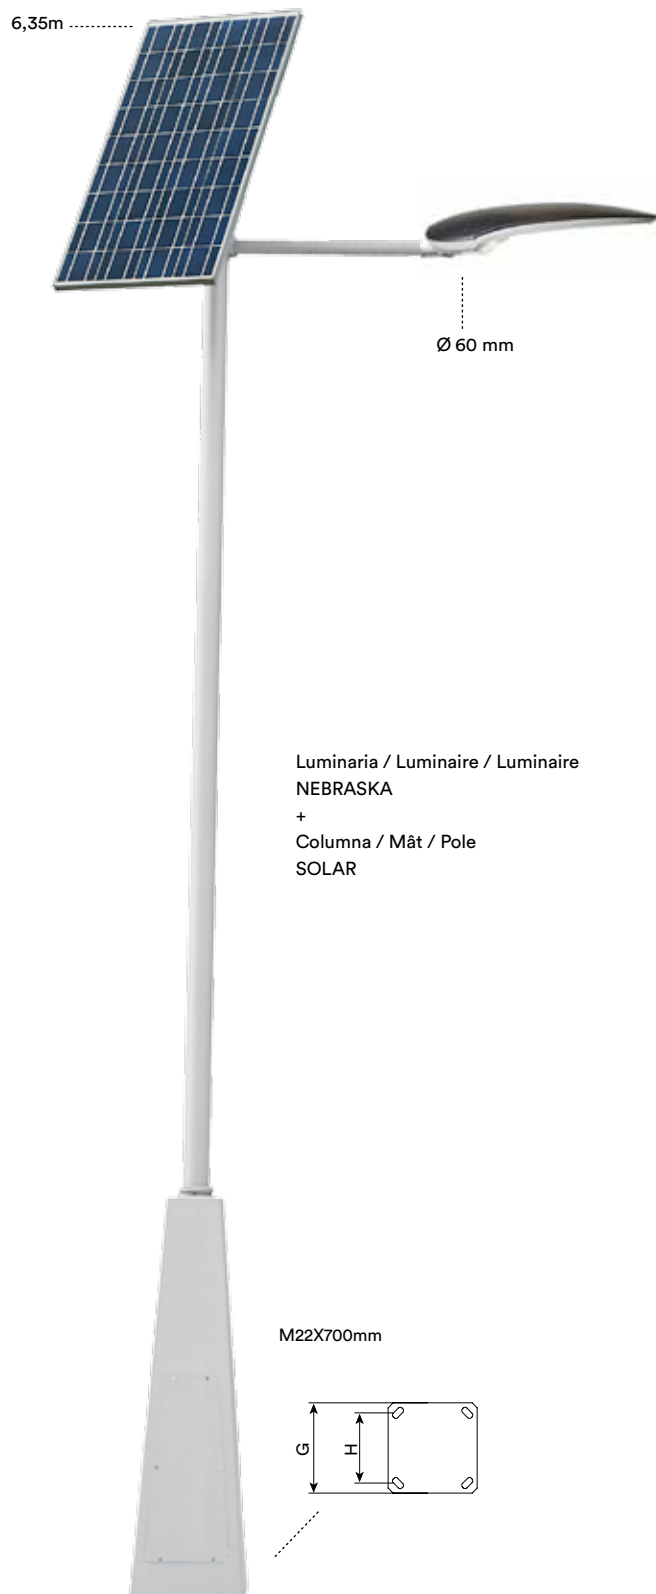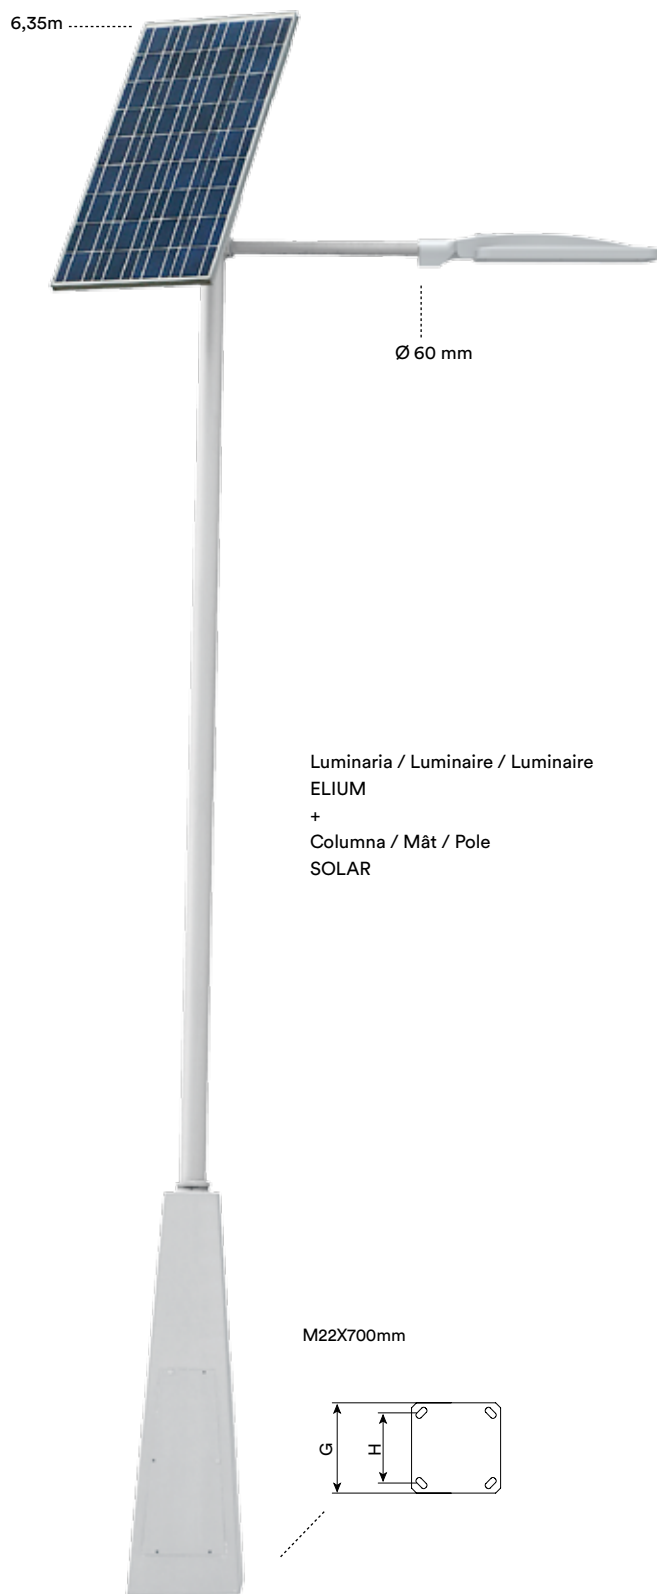

REFERENCE	N° LEDs	P _{Out} [W]	P _{In} [W]	φ [lm]	η _p [lm/W]	I [mA]	T ^a [K]	Input [V]	Life Time [h]	T2	T3	T5
ILLI01643310	16	31	34	3457	102	640	4000	12-24V DC	50.000		✓	
ILNE01643310	16	31	34	3359	99	640	4000	12-24V DC	50.000		✓	
ILVE01643310	16	31	34	3468	102	640	4000	12-24V DC	50.000		✓	

Class III

BENITO
-Urban
-Light
-Play
-Covers

Barcelona T +34 938 521 000 Madrid T +34 916 436 964 info@benito.com www.benito.com

EUROPE: France +33 0 468 210 992 Portugal +35 1 308 802 832 Italy +39 02 89 877 711 Romania +40 318 110 991 Poland +48 223 971 508 Russia +7 499 504 28 76
AMERICA: USA +1 617 778 29 47 Argentina +54 1 159 844 113 Chile +56 2 938 20 35 Mexico +52 5 546 319 722 Brazil +55 1 139 570 340 Peru +51 1707 1369
ASIA China +86 1 063 705 530 Dubai +971 566 506 930 India +91 9560 695 254