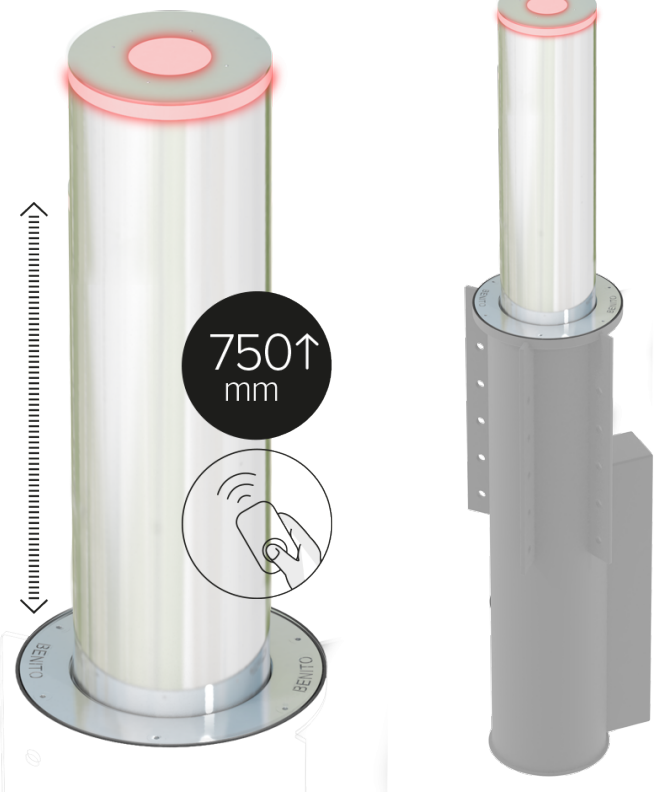


H7508

Bollard

TELESCÓPICA AUTOMÁTICA PLAZA Ø0.34"x29.53"

Regulations and certifications:

ISO 9001 ISO 50001 ISO 14001 ISO 45001


Bollard designed for access control on public roads, in communities, businesses, etc. Manufactured with a satin-finished AISI-304 stainless steel piston, Ø0.34"x23.62" high. Surface cover, chassis, fasteners, and screws are all made of stainless steel. Signaling is provided by a red/green LED ring, functioning as a traffic light. Includes a metal detector for added safety. Operates via remote control or other devices. Maximum visibility is ensured by the LED ring, which also functions as a traffic light. Positive safety mechanism: when power is cut, the piston tends to lower. This prevents the bollard from lifting even when a vehicle is on top. Electronic limit switches are located at the top for greater reliability and never come into contact with water.

		H7508	H7513
DIMENSIONS AND MATERIALS	HEIGHT FROM GROUND LEVEL		**29.53"**
	THICKNESS		**0.51"**
	BOLLARD DIAMETER		**Ø8.66"**
	BOX DIMENSIONS		**13.39x13.39x0.05"**
	BOLLARD MATERIAL	**Stainless steel**	**Stainless steel**
		AISI 304 satin finish	**AISI 304 satin finish**
FEATURES			**230V 50HZ**
	CONSUMPTION		**700 W**
	MOTOR POWER		**300W (3.000RPM)**
FUNCTIONAL FEATURES	SYSTEM		
	TEMPERATURE RANGE		**-20ºC +80ºC**
	IP PROTECTION RATING		**IP67**
	WORKING FREQUENCY		**1400Nw**
	ASCENT TIME	**3-4 seconds**	**3-4 seconds**
	LOWERING TIME	**3-4 seconds**	**3-4 seconds**
	CONTROL PANEL		**BC20**
IMPACT RESISTANCE	**155,000 JOULES**	**750,000 JOULES**	
	REFLECTIVE BAND	**OPTIONAL**	**OPTIONAL**
	SAFETY OF PEOPLE AND PROPERTY	**OPTIONAL**	**OPTIONAL**
	LIGHTED CROWN	**YES, RGB LED**	**YES, RGB LED**

V. 2026-09-21 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.

BENITO


info@benito.com
tel. 93 852 1000



Ref.	ØA	B	C	D	H1	H		Wt
H7508	8.66"	10.79"	13.39"	29.53"	41.73"	71.26"	0.31"	-
H7513	8.66"	10.79"	13.39"	29.53"	47.64"	71.26"	0.51"	-

TELESCÓPICA AUTOMÁTICA PLAZA Ø220 x 600mm

H6008



Downloads: *Project sheet* | *CAD* | *Mounting instructions* | *BIM*

V. 2026-09-21 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.