

UM367B

Sidewalk

NEOBARCINO 700



Controlled
logging



Graffiti
protector



Inclusive
Product

Regulations and certifications:




0.7m bench made of tropical wood and painted steel

Bench 0.7m long. Steel structure with **FERRUS** hammered grey treatment. Seat formed by 4 slats of equal rectangular section 3.94x1.18", of solid tropical wood, FSC certified 100% protected with **LIGNUS** and **GRAFUS** treatment (anti-graffiti treatment for wooden surfaces). Fixing to the floor by means of four Ø0.39" bolts.

Materials & Finishes:

Steel with FERRUS treatment: an iron protection process that ensures optimal corrosion resistance. The Ferrus treatment consists of three layers applied after cleaning all dirt and impurities using shot blasting, and it involves an electrolytic bath followed by an epoxy primer and a final coating of polyester powder paint.

Hardwood treated with LIGNUS: Wood from responsible forestry. Density greater than 930kg/m³, at 12% humidity, treated with a triple-layer LIGNUS coating, fungicide, insecticide, and water-repellent that provides protection against moisture penetration. Final finish with a layer of natural pigment in a satin finish, which provides additional protection against UV rays, the main cause of deterioration in this type of material.

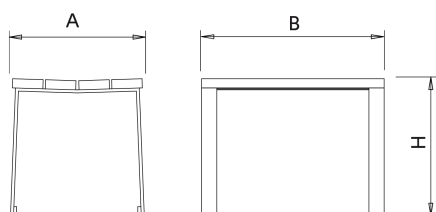

Ref.	A	B	H	Wt
UM367B	16.77"	27.56"	17.72"	-

BENITO

info@benito.com
tel. 93 852 1000

Sidewalk NEOBARCINO 700

UM367B

Neobarmino
UM367T



NeoBarcino
UM304NS



NeoBarcino
UM304N



Neobarmino 1800
UM367M



Downloads: [Project sheet](#) | [CAD](#) |

